

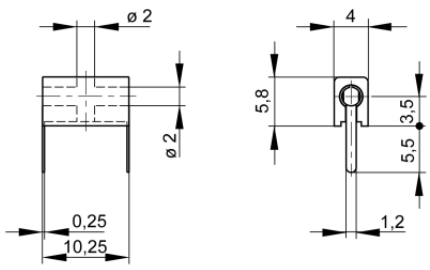


Sockets

MPB 1



Product	MPB 1
description	2 mm diameter miniature test socket, dimensions complying with DIN 41649. Suitable for measuring and testing printed circuits during operation. Tin-plated sprung bronze contact spring. Test socket with horizontal and vertical connections.
operating instruction	BA204
article-no. / *colour	9302241xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;">  00 black </div> <div style="text-align: center;">  01 red </div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Sn</div>
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material socket	contact spring: bronze
housing material	PC
temperature range acc. To IEC61010 ⁽²⁾	-20 °C to +60 °C
inflammability class acc. to UL 94 (only valid for basic material of housing)	HB

2 mm system

⁽¹⁾ for normal environmental conditions 5°C to 40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains
stand: 15.06.2022