





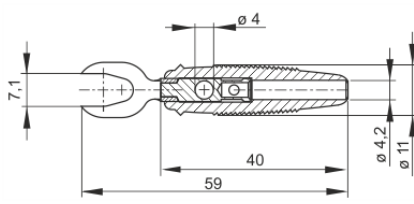


## Plugs

### KB 3



Product	KB 3
description	Cable lug with shatter-proof, flexible insulated sleeve with 4 mm diameter transverse hole. Solder connection up to a maximum of 2.5 mm <sup>2</sup> . For connection to bolts from 4 mm to 7 mm diameter. Nickel-plated brass contact material.
operating instruction	BA409
article-no. / *colour	9305851xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> <div style="text-align: center;"> 07 white</div> </div> <div style="text-align: right; margin-top: 5px;"><b>Ni</b></div>
drawing	
technical data	
connection	solder connection
rated voltage <sup>(1)</sup>	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O <sup>(3)</sup>
rated current <sup>(1)</sup> (consider derating curve)	30 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010 <sup>(2)</sup>	-25 °C to +70 °C
standard	IEC 61010

4 mm system

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 06.05.2019