



## Plugs

### MST 201

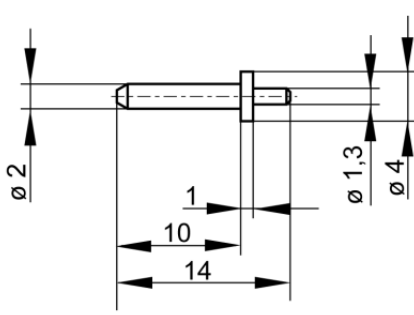

| Product   | MST 201   |
|---|---|
| description   | 2 mm diameter miniature connector pin for soldering into printed boards. Connects with MKU 1 and MBU 2. This connector pin is used together with the MBU 2 socket in stacking printed boards. Connector pins are installed at a spacing pitch from 5 mm up. |
| operating instruction                                     | BA208   |
| Articlenummer   | 931338001   |
|   | <b>Ni</b>   |
| drawing   |   |
|   |   |
| technical data  |   |
| connection  | solder connection   |
| rated voltage <sup>(1)</sup>                              | 30 VAC / 60 VDC   |
| measurement cat. acc. to IEC 61010                        | O <sup>(3)</sup>  |
| rated current <sup>(1)</sup><br>(consider derating curve) | 6 A   |
| material plug   | brass, nickel plated  |
| temperature range acc. To IEC61010 <sup>(2)</sup>         | -20 °C to +60 °C  |
| standard  | IEC 61010   |

2 mm system

<sup>(1)</sup> for normal environmental conditions -5°C to +40°C

<sup>(2)</sup> contact the manufacturer for applications at deviating temperature ranges

<sup>(3)</sup> without rated measurement category, for other circuits that are not directly connected to mains

stand: 19.06.2019