
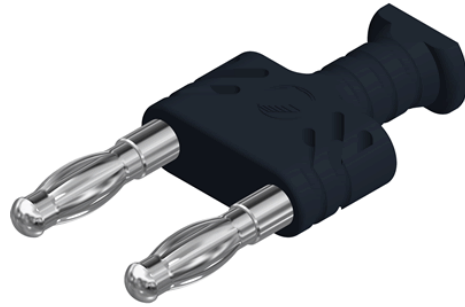


Plugs

KST WS 14/4

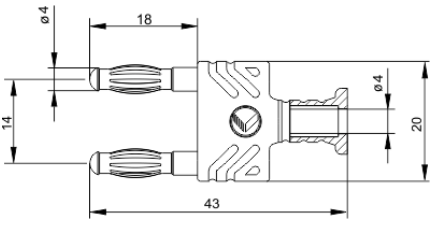

| Product | KST WS 14/4 |
|--|---|
| description | Jumper plug with spring-loaded 4 mm plugs and one 4 mm unsprung socket for connection with all 4 mm spring-loaded plugs that are not contact-protected. Shatter-proof insulation. |
| operating instruction | BA416 |
| article-no. / *colour | 9722651xx ● 00 black |
| | Ni |
| drawing | |
| |  |
| technical data | |
| rated voltage ⁽¹⁾ | 30 VAC / 60 VDC |
| measurement cat. acc. to IEC 61010 | O ⁽³⁾ |
| rated current ⁽¹⁾ (consider derating curve) | 32 A |
| material plug | brass, nickel plated |
| housing material | PBT |
| temperature range acc. To IEC61010 ⁽²⁾ | -15 °C to 70 °C |
| flammability class acc. to UL 94 (only valid for basic material of housing) | HB |
| standard | IEC 61010 |

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 20.06.2019