






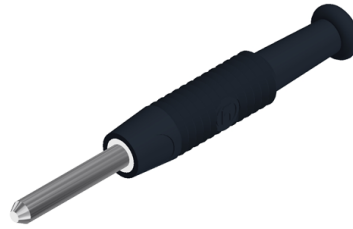


Plugs

MST 3



Product	MST 3
description	2 mm diameter miniature connector, nickel-plated brass pin with solder connection. Flexible, shatter-proof insulated sleeve. For making up connecting leads with a maximum external diameter of 1.9 mm.
operating instruction	BA207
article-no. / *colour	9735091xx <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> 00 black</div> <div style="text-align: center;"> 01 red</div> <div style="text-align: center;"> 02 blue</div> <div style="text-align: center;"> 03 yellow</div> <div style="text-align: center;"> 04 green</div> <div style="text-align: center;"> 06 gray</div> </div> <div style="text-align: right; border: 1px solid black; padding: 2px; margin-top: 5px;">Ni</div>
drawing	
technical data	
connection	solder connection
rated voltage ⁽¹⁾	30 VAC / 60 VDC
measurement cat. acc. to IEC 61010	O ⁽³⁾
rated current ⁽¹⁾ (consider derating curve)	6 A
material plug	brass, nickel plated
housing material	PVC-P
temperature range acc. To IEC61010 ⁽²⁾	-25 °C to +60 °C
standard	IEC 61010

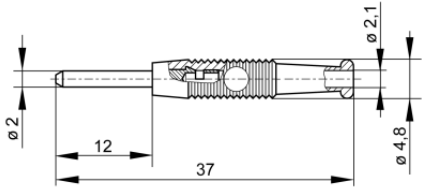2 mm system

⁽¹⁾ for normal environmental conditions -5°C to +40°C

⁽²⁾ contact the manufacturer for applications at deviating temperature ranges

⁽³⁾ without rated measurement category, for other circuits that are not directly connected to mains

stand: 19.06.2019