


Sockets

MSEB 2600 G M3 Au

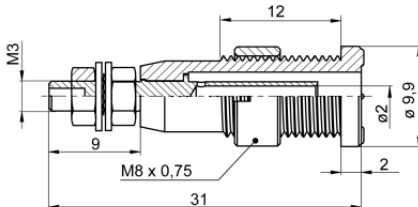

Product	MSEB 2600 G M3 Au
description	Miniature - safety built-in socket, 2mm diameter, touch protected, M3 threaded connection and soldering hole, gold-plated brass. For installation into switch- panels and equipment chassis with a wall thickness up to 8mm. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754547xx 00 black 01 red 02 blue 03 yellow 04 green 05 brown 06 gray 07 white 09 violet Au
drawing	
	
technical data	
connection	M3 thread, solder connection
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽¹⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 21.06.2022

stand: 21.06.2022