


Sockets

MSEB 2610 F 2,8 Au

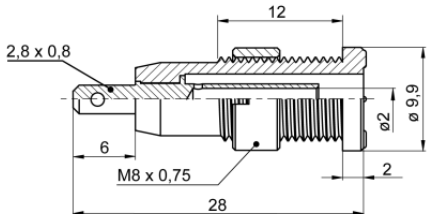

Product	MSEB 2610 F 2,8 Au
description	Miniature safety built-in socket, 2mm diameter, gold-plated brass. Flat push-on Connection 2.8x0.8mm complying with DIN 46244. For installation into switch-panels and equipment Chassis till 8mm wall thickness. Installation hole: 8mm diameter
operating instruction	BA254
article-no. / *colour	9754557xx  00 black  01 red  02 blue  03 yellow  04 green  05 brown  06 gray  07 white  09 violet Au
drawing	
	
technical data	
connection	flat connector 2.8 x 0.8 mm
rated voltage	AC/DC 1000 V
measurement cat. acc. to IEC 61010	CAT III
rated current (consider derating curve)	10 A
material socket	brass, gold plated
housing material	PA
temperature range acc. To IEC61010 ⁽¹⁾	-25 °C to +70 °C
flammability class acc. to UL 94 (only valid for basic material of housing)	V-2

⁽¹⁾ contact the manufacturer for applications at deviating temperature ranges

stand: 21.06.2022

stand: 21.06.2022